


MEEG 4103 Quiz 4.1.081 A steel countershaft with roller bearings at O and B is in equilibrium as shown, where $T_1 = 6T_2$. Taking the bearings as simple supports, determine (a) the deflection y_C at C , (b) the minimum shaft diameter d_{\min} needed, using $\frac{1}{8}$ -in. increments, if the slope at either bearing should not exceed 0.05° , (c) the value of y_C when the shaft diameter is d_{\min} .

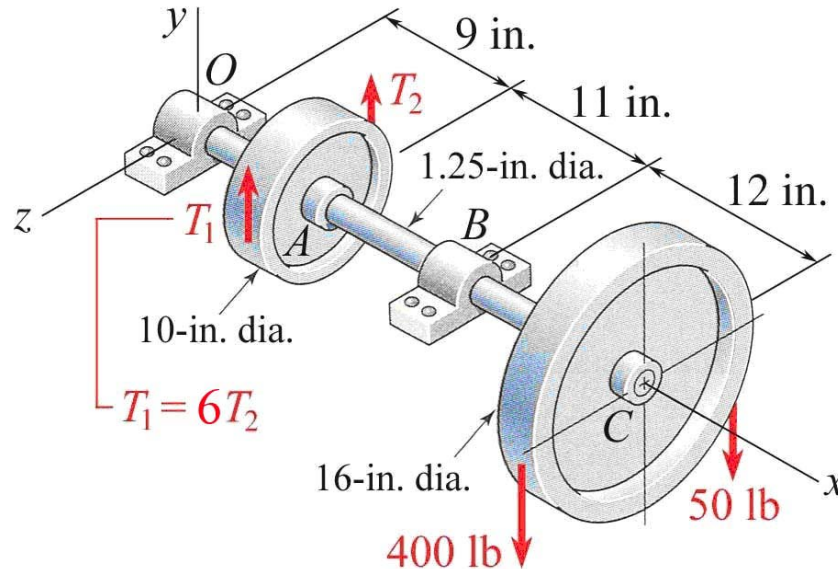

$$E = 30 \times 10^6 \text{ psi} \quad I = \frac{\pi}{4} r^4 \quad T_1 = 672 \text{ lb} \quad T_2 = 112 \text{ lb} \quad \textcircled{1}$$

$$\text{In FBD } \textcircled{1} \text{ for shaft: } \mathbf{O}_y = 701.2 \text{ lb } \downarrow \quad \mathbf{B}_y = 367.2 \text{ lb } \uparrow \quad \textcircled{1}$$

$$\text{In FBD for CB: } \textcircled{1} \quad O_y^c = \frac{38\,050.8}{EI} \quad M_C^c = -\frac{916\,286.4}{EI}$$

$$(a) \quad 2r = d = 1.25 \text{ in.} \quad y_C = M_C^c \quad y_C = -0.255 \text{ in.} \quad \textcircled{1}$$

$$(b) \quad \text{At } O: \quad \theta_O = V_O^c = O_y^c \leq 0.05\pi/180: \quad d \geq 2.333 \text{ in.} \quad \textcircled{1}$$

$$\text{At } B: \quad \theta_B = V_B^c, \quad |V_B^c| \leq 0.05\pi/180: \quad d \geq 2.555 \text{ in.} \quad \textcircled{1}$$

$$\text{Use } d_{\min} = 2\frac{5}{8} \text{ in.} \quad \textcircled{1} \quad (c) \quad y_C = -0.01310 \text{ in.} \quad \textcircled{1}$$